

## SF 0/12 MC NE GE V2


**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

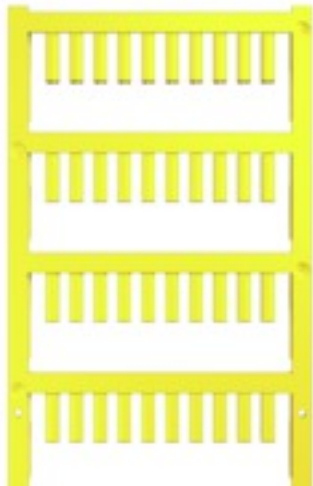

Similar to illustration



SlimFix are conductor and cable markers with a space-saving design. The markers can be fitted even after the conductor has been installed. They consist of halogen-free material and comply with flammability rating V0/V2. SlimFix is an acknowledged and accredited marker type for traffic engineering applications. The SF tool allows easy installation, even in case of small markers.

### Advantages:

- Halogen-free material
- Flammability rating V0/V2
- Approved and accredited markers for traffic engineering applications, etc.
- Has to be fixed with cable ties if the conductor cross-section is larger than 16.0 mm<sup>2</sup>
- Markers in proven MultiCard format

### General ordering data

Version	SlimFix, Conductor and cable markers, 1.2 - 1.6 mm, 12 x 3.2 mm, yellow
Order No.	<a href="#">1919210000</a>
Type	SF 0/12 MC NE GE V2
GTIN (EAN)	4032248555604
Qty.	400 pc(s).
compatible printer	<a href="#">2438520000</a> <a href="#">2438510000</a>

## SF 0/12 MC NE GE V2

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

Depth	3.2 mm	Depth (inches)	0.126 inch
Height	12 mm	Height (inches)	0.472 inch
Net weight	0.244 g	Width	3.2 mm
Width (inches)	0.126 inch		

## Temperatures

Operating temperature range	-40...100 °C
-----------------------------	--------------

## General data

Colour	yellow	Halogen	No
Material	Polyamide 66	Material colour according to resistance code	4
Number of markers per combination	1 MultiCard = Conductor and cable markers	Operating temperature range	-40...100 °C
Operating temperature range, max.	100 °C	Operating temperature range, min.	-40 °C
Recommended industries	Transportation, Machinery	Size of labelling field	12 x 3.2 mm
Type of printing	neutral	UL 94 flammability rating	V-2
Width	3.2 mm		

## Conductor and cable markers

Conductor O.D.	1.2 - 1.6 mm	Conductor O.D., max.	1.6 mm
Conductor O.D., min.	1.2 mm	Conductor cross-section, max.	0.5 mm <sup>2</sup>
Conductor cross-section, min.	0.25 mm <sup>2</sup>	Cross-section for connected wire	0.25 - 0.5 mm <sup>2</sup>
Halogen	No		

## Classifications

ETIM 6.0	EC001530	ETIM 7.0	EC001530
ECLASS 9.0	27-40-04-01	ECLASS 9.1	27-40-04-01
ECLASS 10.0	27-40-04-01	ECLASS 11.0	27-28-11-02

## Approvals

ROHS	Conform
------	---------

## Downloads

Engineering Data	<a href="#">STEP</a>
Engineering Data	<a href="#">EPLAN, WSCAD, Zuken E3.S</a>

**Data sheet**

**SF 0/12 MC NE GE V2**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

**Drawings**

