

SF 1/21 MC NE RT V2


Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

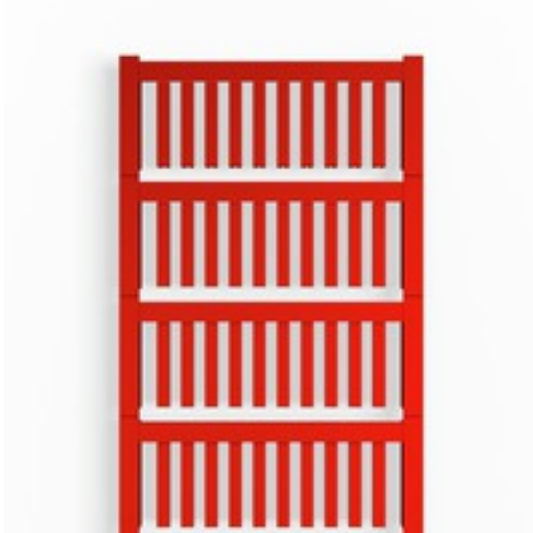

Similar to illustration



SlimFix are conductor and cable markers with a space-saving design. The markers can be fitted even after the conductor has been installed. They consist of halogen-free material and comply with flammability rating V0/V2. SlimFix is an acknowledged and accredited marker type for traffic engineering applications. The SF tool allows easy installation, even in case of small markers.

Advantages:

- Halogen-free material
- Flammability rating V0/V2
- Approved and accredited markers for traffic engineering applications, etc.
- Has to be fixed with cable ties if the conductor cross-section is larger than 16.0 mm²
- Markers in proven MultiCard format

General ordering data

| | |
|--------------------|--|
| Version | SlimFix, Conductor and cable markers, 1.7 - 2.1 mm, 21 x 3.2 mm, red |
| Order No. | 191860000 |
| Type | SF 1/21 MC NE RT V2 |
| GTIN (EAN) | 4032248554454 |
| Qty. | 400 pc(s). |
| compatible printer | 2438520000 2438510000 |

SF 1/21 MC NE RT V2

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

| | | | |
|----------------|------------|-----------------|------------|
| Depth | 3.2 mm | Depth (inches) | 0.126 inch |
| Height | 21 mm | Height (inches) | 0.827 inch |
| Net weight | 0.295 g | Width | 3.2 mm |
| Width (inches) | 0.126 inch | | |

Temperatures

| | |
|-----------------------------|--------------|
| Operating temperature range | -40...100 °C |
|-----------------------------|--------------|

General data

| | | | |
|-----------------------------------|--------------|-----------------------------------|---|
| Colour | red | Halogen | No |
| Material | Polyamide 66 | Number of markers per combination | 1 MultiCard = Conductor and cable markers |
| Operating temperature range | -40...100 °C | Operating temperature range, max. | 100 °C |
| Operating temperature range, min. | -40 °C | Recommended industries | Transportation, Machinery |
| Size of labelling field | 21 x 3.2 mm | Type of printing | neutral |
| UL 94 flammability rating | V-2 | Width | 3.2 mm |

Conductor and cable markers

| | | | |
|-------------------------------|---------------------|----------------------------------|----------------------------|
| Conductor O.D. | 1.7 - 2.1 mm | Conductor O.D., max. | 2.1 mm |
| Conductor O.D., min. | 1.7 mm | Conductor cross-section, max. | 0.75 mm ² |
| Conductor cross-section, min. | 0.5 mm ² | Cross-section for connected wire | 0.5 - 0.75 mm ² |
| Halogen | No | | |

Classifications

| | | | |
|-------------|-------------|-------------|-------------|
| ETIM 6.0 | EC001530 | ETIM 7.0 | EC001530 |
| ECLASS 9.0 | 27-40-04-01 | ECLASS 9.1 | 27-40-04-01 |
| ECLASS 10.0 | 27-40-04-01 | ECLASS 11.0 | 27-28-11-02 |

Approvals

| | |
|------|---------|
| ROHS | Conform |
|------|---------|

Downloads

| | |
|-----------------------------|--|
| Engineering Data | STEP |
| Engineering Data | EPLAN, WSCAD, Zuken E3.S |
| Product Change Notification | Technical change - DE Technical change - EN |

Data sheet

SF 1/21 MC NE RT V2

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

